

# SG111HV

String Inverter for Japan 1500 Vdc System



To buy, contact | Starc Energy | Tel: +91-9999123078 | Web: [www.starcenergy.com](http://www.starcenergy.com)



#### High Yield

- Five-level topology, Max. efficiency 98.9%
- Max. DC/AC ratio up to 1.5
- Full power operation without derating at 50 °C



#### Easy O&M

- Virtual central solution, easy for O&M
- Anti-corrosion design
- Plug-in design of fan and SPD, easy for on-site maintenance



#### Saved Investment


- DC 1500 V, low system cost and cable loss
- AC 540 V, high-voltage and ultra-high-voltage PV station application
- Suitable for horizontal and vertical installation




#### Grid Support

- Compliance with Japan utility grid standards
- Fault ride through (FRT) 2017
- Remote active power control

#### Circuit Diagram

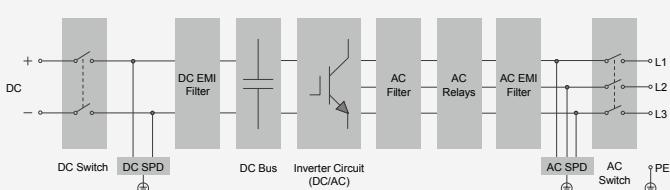

#### Efficiency Curve

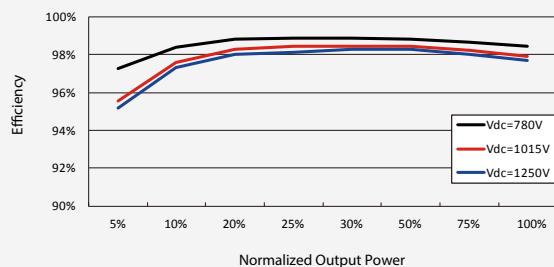

© 2018 Sungrow Power Supply Co., Ltd. All rights reserved.  
Subject to change without notice. Version 1.0

<b>Input (DC)</b>		<b>SG111HV</b>
Max. PV input voltage	1500 V	
Min. startup input voltage	835 V	
Nominal input voltage	1015 V	
MPP voltage range	780 – 1450 V	
MPP voltage range for nominal power	780 – 1250 V	
No. of independent MPP inputs	1	
No. of PV strings	1	
Max. PV input current	146 A	
Max. DC short-circuit current	240 A	
<b>Output (AC)</b>		
AC output power	111000 VA @ 50 °C / 113000 VA @ 50 °C (settable)	
Max. AC output current	121 A	
Nominal AC current	118.7 A	
Nominal AC voltage	3 / PE, 540 V	
AC voltage range	432 – 648 V	
Nominal grid frequency / Grid frequency range	50 Hz / 60 Hz, 45 - 55 Hz / 55 - 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % In	
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Connection phases	3	
<b>Efficiency</b>		
Max. efficiency / Euro. efficiency	98.90 % / 98.70 %	
<b>Protection</b>		
Grid protection	OVR / UVR / OFR / UFR	
FRT	FRT 2017	
DC reverse connection protection	Yes	
Leakage current protection	Yes	
AC short-circuit protection	Yes	
DC Overvoltage protection	Type II	
AC Overvoltage protection	Type II	
DC switch / AC switch	Yes / Yes	
<b>General Data</b>		
Weight	76 kg	
Dimensions (W*H*D)	670 * 902 * 296 mm	
Isolation method	Transformerless	
Degree of protection	IP65	
Night power consumption	< 4 W	
Operating ambient temperature range	-25 to 60 °C (> 50 °C derating)	
Allowable relative humidity range	0 – 100 % (non-condensing)	
Cooling method	Smart forced air cooling	
Max. operating altitude	4000 m (> 3000 m derating)	
Display / Communication	LED, Bluetooth+APP / RS485	
DC connection type	OT or DT terminal (Max. 60 mm <sup>2</sup> )	
AC connection type	OT or DT terminal (Max. 150 mm <sup>2</sup> )	
Grid support	Fault ride through (FRT) 2017, Remote active power control	
Type designation	SG111HV-10	

To buy, contact | Starc Energy | Tel: +91-9999123078 | Web: [www.starcenergy.com](http://www.starcenergy.com)

